



SERIES CHART OF CAPACITORS


Solid Cap (Aluminum Solid Electrolytic Capacitor With Conductive Polymer)

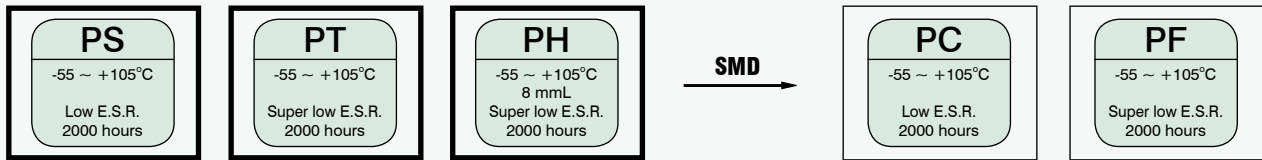

Chip Type (Surface Mounted Device)

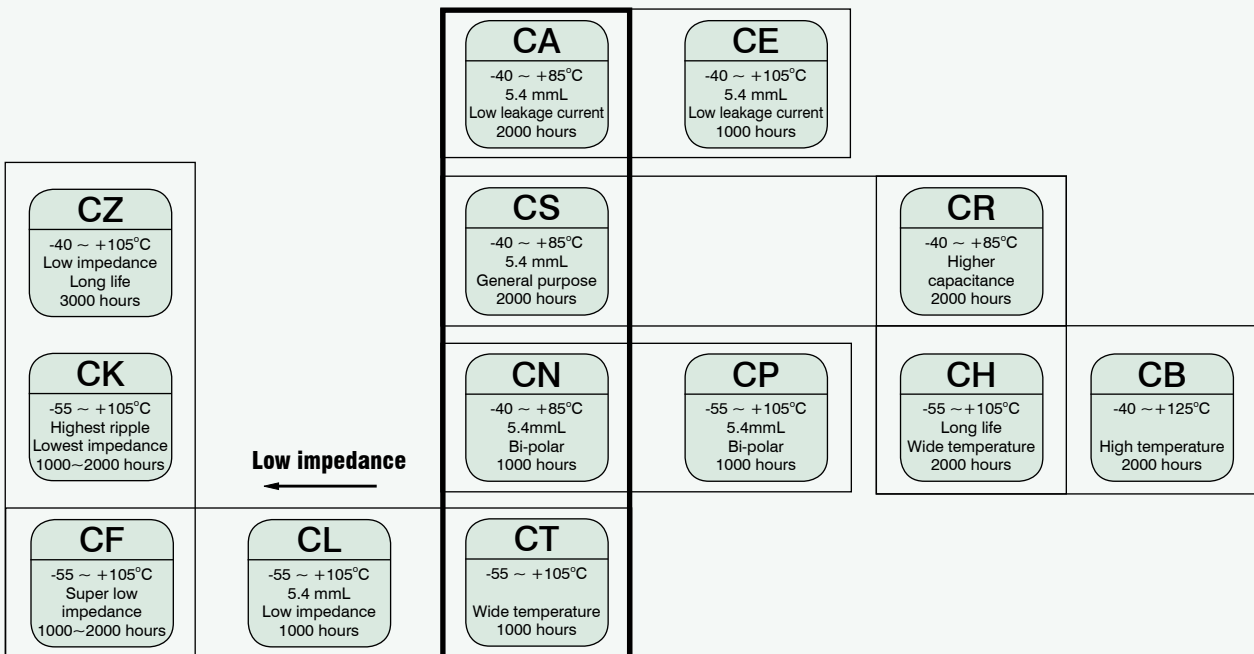

SERIES CHART OF CAPACITORS

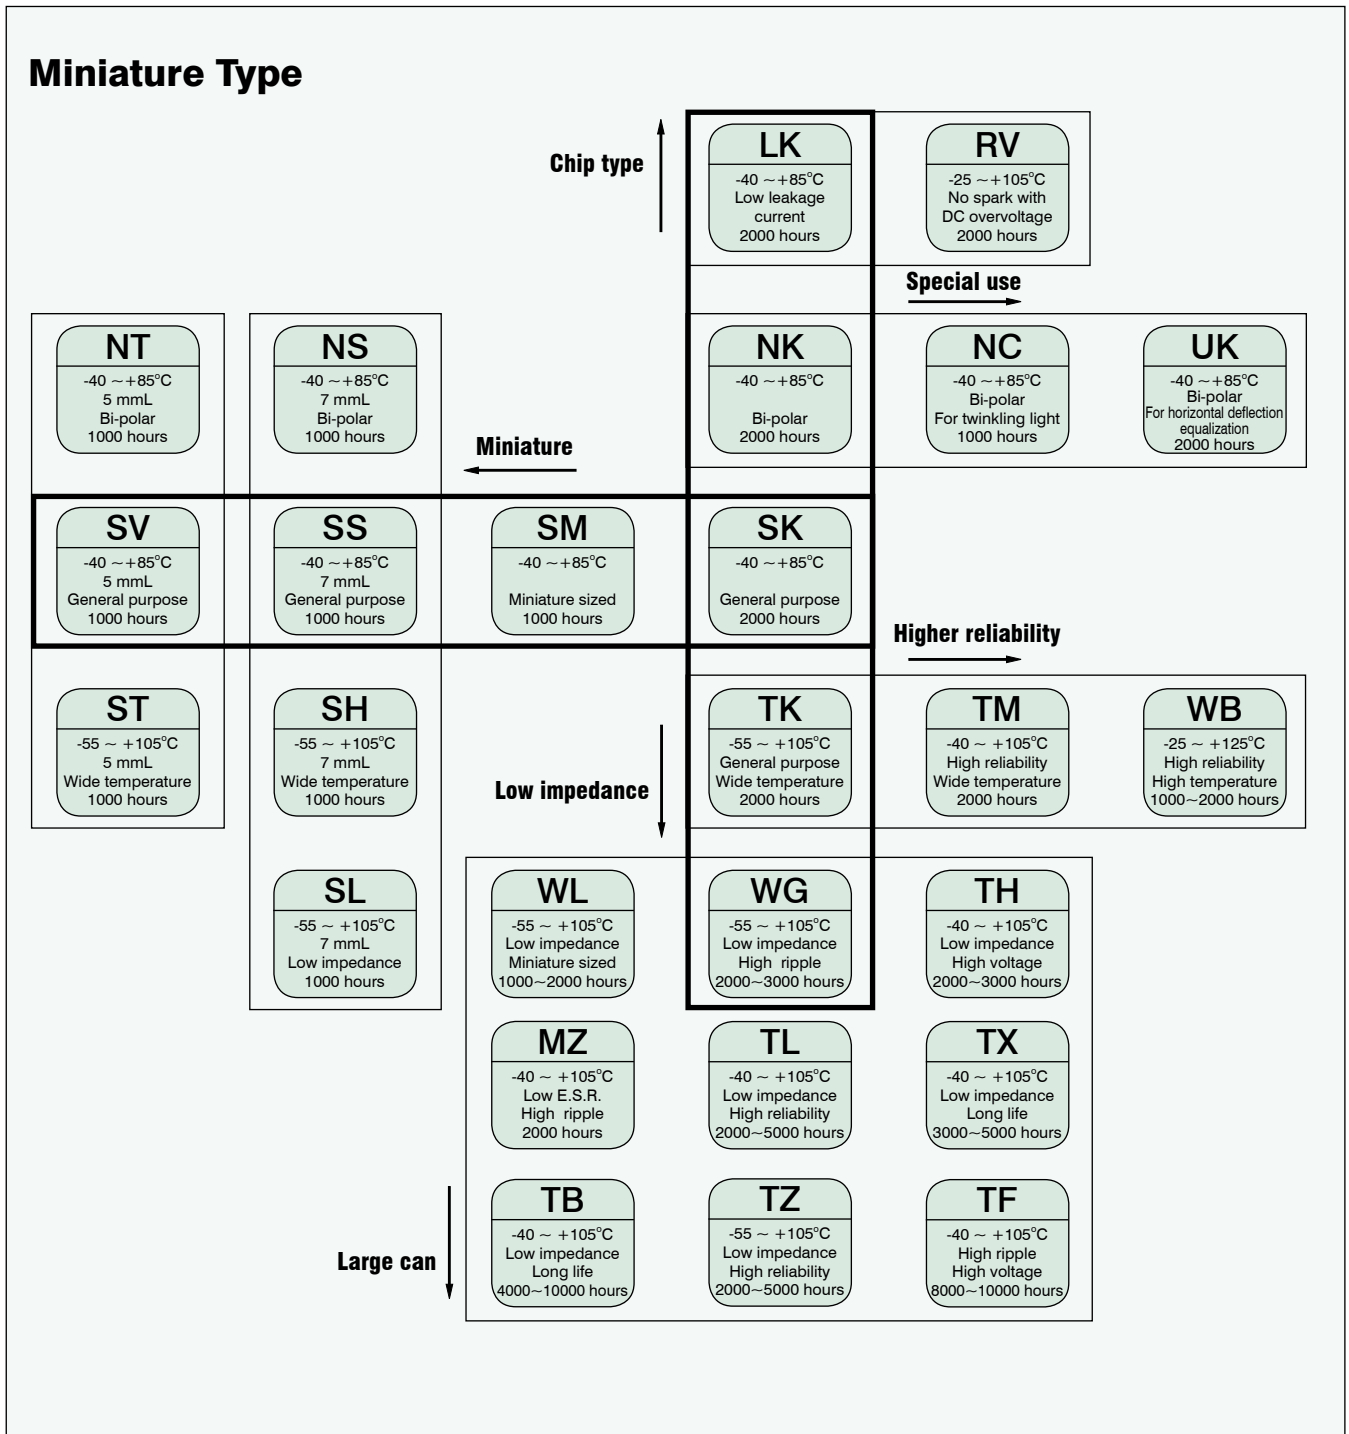

SERIES CHART OF CAPACITORS

Large Can Type

<p>KP</p> <p>-40 ~ +85°C Screw terminal General purpose 2000 hours</p> <p>MP</p> <p>-40 ~ +85°C Screw terminal High reliability 5000 hours</p> <p>RP</p> <p>-40 ~ +105°C Screw terminal Wide temperature 2000 hours</p> <p>XP</p> <p>-40 ~ +105°C Screw terminal Wide temperature 5000 hours</p> <p>Screw terminal</p>	<p>Screw type</p> <p>←</p>		<p>LS</p> <p>-40 ~ +85°C Snap-in terminal Low profile 2000 hours</p>	<p>LP</p> <p>-40 ~ +85°C Snap-in terminal General purpose 2000 hours</p>	<p>LT</p> <p>-40 ~ +85°C Snap-in terminal High ripple long life 3000 hours</p>	<p>LL</p> <p>-40 ~ +85°C Snap-in terminal High voltage 5000 hours</p>	
	<p>HV</p> <p>-25 ~ +105°C Snap-in terminal No sparks with DC overvoltage 3000 hours</p>	<p>HS</p> <p>-40 ~ +105°C Snap-in terminal Low profile Wide temperature 2000 hours</p>	<p>HP</p> <p>-40 ~ +105°C Snap-in terminal Wide temperature 2000 hours</p>	<p>Long life</p> <p>→</p>			<p>HT</p> <p>-40 ~ +105°C Snap-in terminal High ripple long life 3000 hours</p>
	<p>HL</p> <p>-40 ~ +105°C Snap-in terminal Wide temperature 5000 hours</p>	<p>HM</p> <p>-25 ~ +105°C Snap-in terminal Small than HS series 2000 hours</p>	<p>Snap-in terminal</p>				
	<p>HF</p> <p>-40 ~ +105°C Snap-in terminal High voltage 7000 hours</p>	<p>HX</p> <p>-40 ~ +105°C Snap-in terminal High voltage 10000 hours</p>					