


ENERGIZER CR2032

Lithium Coin



Industry Standard Dimensions

mm (inches)

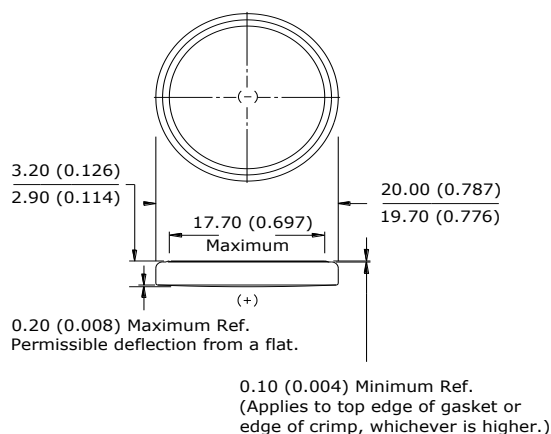


Simulated Application test

Typical Performance at 21°C (70°F)

| Schedule: | Typical Drains: | Load | Cutoff |
|------------|-----------------|--------|-----------------|
| | at 2.9V (mA) | (ohms) | 2.0V (hours) |
| Continuous | 0.19 | 15,000 | 1245 |

Continuous Discharge Characteristics

Load: 15K ohms - continuous 21°C (70°F)
Typical Drain @ 2.9V: 0.19 mA

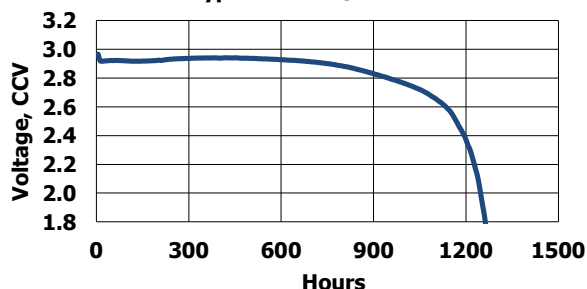


Pulse Discharge Characteristics

Pulse Test at 21°C (70°F)

Bkgnd Drain: Continuous
21°C (70°F) 15K ohms
0.19 mA @2.9V

Pulse Drain: 2 seconds X 12 times/day
400 ohms
~6.8 mA @2.7V

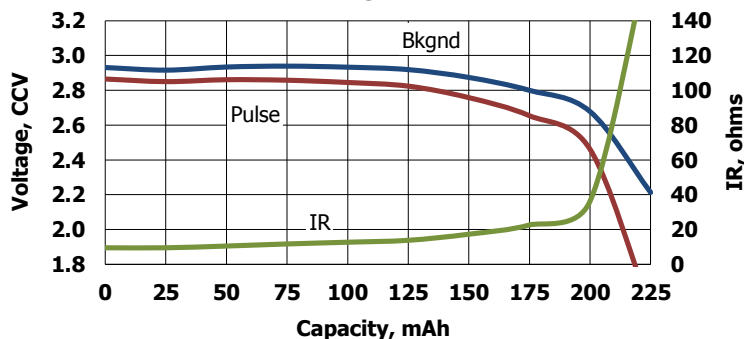

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.